

DEVELOPMENT OF AN 805-MHZ, 550 KW PULSED KLYSTRON FOR THE SPALLATION NEUTRON SOURCE*

S. Lenci, E. Eisen, and B. Stockwell, CPI, Palo Alto, CA, USA

Abstract

The Spallation Neutron Source (SNS) is an accelerator-based neutron source being built in Oak Ridge, Tennessee, by the U.S. Department of Energy. The SNS will provide the most intense pulsed neutron beams in the world for scientific research and industrial development. CPI has supported the effort by developing 2.5 MW and 550 kW pulsed klystrons. The 2.5 MW tube met all performance requirements, but a 5 MW version was chosen as the project evolved. Los Alamos National Laboratory has placed an order with CPI for 65 of the 550 kW klystrons for the super-conducting portion of the accelerator. The primary output power requirements are 550 kW peak, 49.5 kW average at 805 MHz, with an electron beam-to-rf conversion efficiency of 65%. The prototype unit has been tested. Performance specifications, computer model predictions, and prototype operating results are presented

The rf-circuits contain six cavities, including one tuned slightly below the second harmonic of the operating frequency. The designs are optimized to provide the required efficiency and gain without compromising bandwidth. The first two cavities are staggered around the operating frequency to provide the bandwidth. Next is the second-harmonic cavity followed by two inductively tuned cavities to optimize the electron bunching. The output cavity then extracts energy from the beam.

The rf-circuit is designed using 1-D and 2-D particle-in-cell codes developed at CPI. Many years of benchmarking the codes to measured results has lead to high confidence in the results. SUPERFISH is used for cavity design, while HFSS and MAFIA are used for the output cavity, coupling loop, and output window design.

1 INTRODUCTION

CPI, formerly the of the Electron Device Group of Varian Associates, has a long history of building high-power pulsed UHF klystrons for many applications. In the early 1970's, approximately 70 VA-862A klystrons were built for the Los Alamos Meson Physics Facility (LAMPF, now known as the Clinton P. Anderson Meson Physics Facility). These tubes were rated for 1.25 MW peak, 150 kW average at 805 MHz

CPI was awarded the contract by LANL to build one 2.5 MW klystron, VKP-8290A, in May 1998, with the unit delivered in September 1999.

An order for 65 of the 550-kW tube, VKP-8291A, was place in February 2001. The prototype unit has been tested. It met all the performance specifications except for the 65% efficiency, which was 62.3%. The contractual delivery rate is 2 per month.

2 DESIGN

2.1 Electrical Design

The electron gun design is primarily performed using XGUN, starting with the electrostatic beam optics. Once the performance is satisfactory, the design is refined with magnetic field is applied. Care is taken to evaluate and minimize the beam scallop down the drift tunnel. Analyses are performed at various operating conditions. The voltage gradients of the gun electrodes are analyzed with a goal of a maximum gradient of 60 kV/cm for this long pulse device. Great care is taken to ensure a well-behaved beam is obtained.

2.2 Mechanical Design

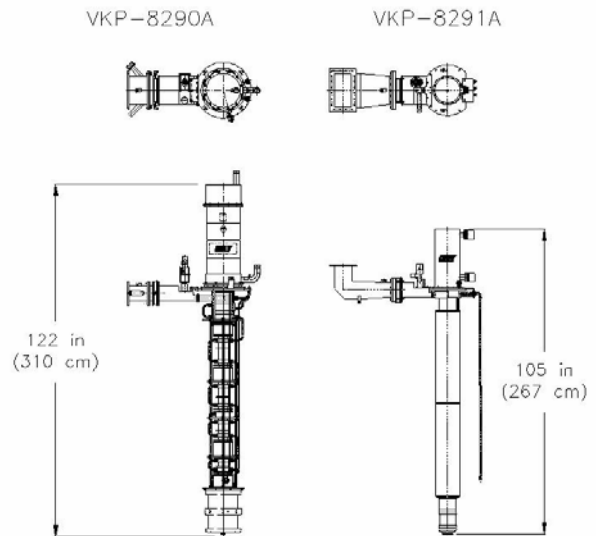


Figure 1: Comparison of SNS Klystrons

Both klystrons were required to operate vertically with the gun down. Figure 1 shows the tubes on the same scale. The two buncher cavities and the two inductively tuned cavities have stainless steel walls with copper endwalls, with cavities 4 and 5 copper plated to reduce resistive loss. The second harmonic and output cavities have OFE copper walls. All cavities on the 2.5 MW klystron, except the output, have one adjustable drift-tube tip and an adjacent flexible cavity endwall to allow for adjusting the tuning. The 550-kW tube incorporates diaphragm tuners in the cavities.

*Work supported by US Department of Energy

The rf energy is extracted through a single window with an alumina ceramic. The pillbox window is designed around WR-975 waveguide.

The collector for both tubes is designed to dissipate the entire beam energy. On the VKP-8290A, it is isolated from the body to allow the monitoring of body current. It is made with thick-walled OFE copper with drilled-holes for the coolant to pass. The water-jacket bolts on with an o-ring seal. On the VKP-8291A, it is made from thick-walled copper with grooves milled into the outer wall for the coolant to pass. The water-jacket is part of the brazed collector assembly. Both collectors were proof tested at 200 psi (13.6 bar). Figure 2 is a photo of the VKP-8291A.



Figure 2: VKP-8291A Klystron

3 TEST RESULTS

3.1 805-MHz, 2.5-MW Peak Klystron

The peak power (2.5 MW), efficiency (55%), gain (45 dB), and bandwidth ($\pm .7$ MHz) specification were all achieved, see Table 1. The bandpass and transfer curves can be seen in figures 3 and 4. The comparison to the predicted performance is quite close. This data was taken at a beam voltage of 113 kV and a beam current of 41.5 amperes.

Table 1: VKP-8290A Performance Summary

	VKP-8290A Specification	VKP-8290A Measured
Frequency	805 MHz	805 MHz
Peak Cathode Voltage	120 kV max	113 kV
Peak Mod Anode Voltage	96 kV max	95.8 kV
Peak Beam Current	55 Amps	41.5 Amps
Perveance	1.1	1.1
Peak Output Power	2,500 kW min	2,605 kW
Efficiency	55% min	55.5 %
RF Duty Cycle	10 %	10 %
RF Pulse Length	1.67 msec	1.67 msec
Peak RF Drive Power	79 Watts	67 Watts
Gain	45 dB	45.9 dB

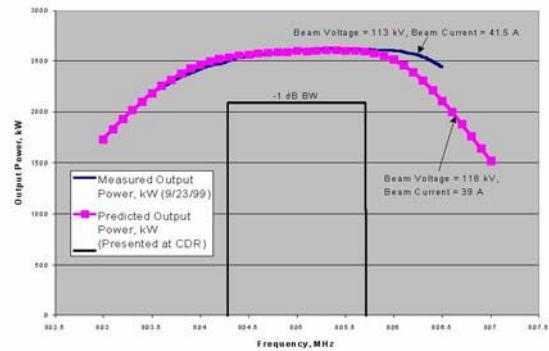


Figure 3: VKP-8290A Bandpass Curve

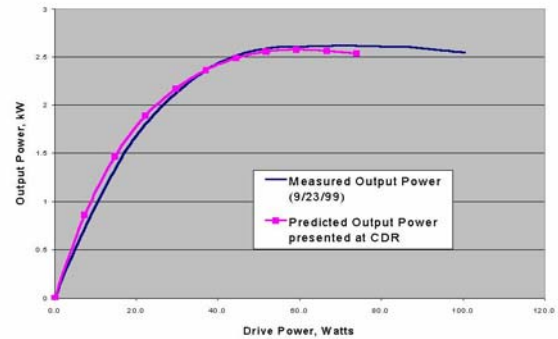


Figure 4: VKP-8290A Transfer Curve

Additionally the klystron had to demonstrate stable performance and achieve 85% of its rated power at six equally spaced positions of a 1.5:1 mismatch. Figure 5 plots a transfer curve at different mismatch positions.

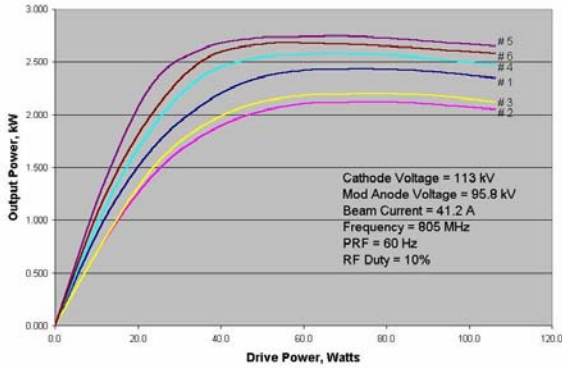


Figure 5: VKP-8290A Transfer Curves at Equally Spaced Mismatch Positions

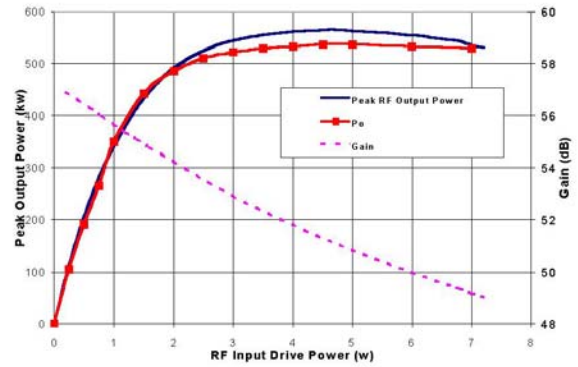


Figure 6: VKP-8291A Transfer Curve

3.2 805-MHz, 550-kW Peak Klystron

The prototype unit has been tested and met all performance specifications except for the efficiency. Only 62.3% was achieved instead of 65%. See Table 2 for the performance summary. The specification efficiency was met when the magnet power was increased above the allowable limit. Modifications to the rf circuit are being implemented to correct this deficiency.

Table 2: VKP-8291A Performance Summary

	VKP-8291A Specification	VKP-8291A Measured
Frequency	805 MHz	805 MHz
Peak Cathode Voltage	76.5 kV max	75 kV
Peak Mod Anode Voltage	N/A	N/A
Peak Beam Current	11.5 Amps	11.5 Amps
Perveance	.55 nom	.56
Peak Output Power	550 kW min	537 kW
Efficiency	65 % min	62.3 %
RF Duty Cycle	9 %	9 %
RF Pulse Length	1.5 msec	1.5 msec
Peak RF Drive Power	5.5 Watts	4.6 Watts
Gain	50 dB min	50.7 dB

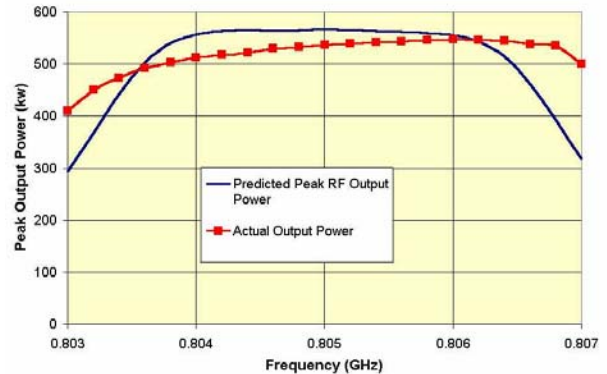


Figure 7: VKP-8291A Predicted Bandpass Curve

4 CONCLUSIONS

The measured results of both SNS klystrons instill high confidence in our simulation codes. Both tubes also demonstrated a high degree of stability under various operating conditions. Although the prototype 550-kW klystron did not meet the efficiency specification, we expect all aspects of the specification will be met on future tubes.

5 ACKNOWLEDGEMENT

The authors would like to thank their co-workers at CPI for their contributions throughout the development of these products. They would also like to thank the CPI management team for their support. Finally many thanks go to the technical leaders and their colleagues at Los Alamos National Lab, in particular Dan Rees and Paul Tallerico.

Figures 6 and 7 present actual and predicted performance of the VKP-8291A.