

# LHC INJECTORS UPGRADE PROJECT: TOWARDS NEW TERRITORY BEAM PARAMETERS

M. Meddahi\*, R. Alemany, H. Bartosik, G. Bellodi, J. Coupard, H. Damerau, G.P. Di Giovanni, A. Funken, B. Goddard, K. Hanke, A. Huschauer, V. Kain, A. Lombardi, B. Mikulec, F. Pedrosa, S. Prodon, G. Rumolo, R. Scrivens, E. Shaposhnikova, CERN, Geneva, Switzerland

## Abstract

The LHC Injectors Upgrade (LIU) project aims at increasing the intensity and brightness in the LHC injectors in order to match the challenging requirements of the High-Luminosity LHC (HL-LHC) project, while ensuring high availability and reliable operation of the injectors complex up to the end of the HL-LHC era (ca. 2035). This requires extensive hardware modifications and new beam dynamics solutions in the entire LHC proton and ion injection chains: the new Linac4, the Proton Synchrotron Booster (PSB), the Proton Synchrotron (PS), the Super Proton Synchrotron (SPS), together with the ion PS injectors (the Linac3 and the Low Energy Ion Ring (LEIR)). All hardware modifications will be implemented during the 2019-2020 CERN accelerators shutdown. This paper will analyze the various project phases, share the lessons learned, and conclude on the expected beam parameter reach, together with the risks.

## LIU PROJECT GOALS AND PHASES

The LIU project aims at increasing the intensity/brightness in the injectors in order to match the HL-LHC requirements for both protons and lead (Pb) ions [1], while ensuring high availability and reliable operation of the injector complex up to the end of the HL-LHC era (ca. 2035) in synergy with the accelerator Consolidation (CONS) project [2]. This goal will be achieved through a series of major upgrades in all accelerators of the LHC injectors chain, which are detailed in [3, 4]. The main items relevant to the desired beam performance will be listed separately for protons and Pb ions in the next sections.

Table 1 summarises the main target parameters at the SPS exit for both protons and Pb ions, as well as the values currently achieved. From this table, it is clear that, while for protons the main challenge lies in reaching the target single bunch parameters (double intensity and roughly double brightness), in the case of the Pb ions the single bunch parameters have been already demonstrated, but the total number of bunches in the LHC will become possible with a novel production scheme based on upcoming LIU upgrades.

The LIU project was launched in 2010, with extensive beam studies taking place in Run 1 (2009 - 2013) and its first systems already installed during the injectors Long Shutdown 1 (LS1 - March 2013 to June 2014). The accelerator timeline as from 2015 up to the LIU project completion in 2021, is sketched in Fig. 1. LIU is currently at the peak of its execution phase, with the largest part of its equipment

Table 1: Beam Parameters at LHC Injection for Protons and Pb Ions, HL-LHC Target and Achieved in Run 2

	$N$ ( $10^{11}$ p/b)	$\epsilon_{x,y}$ ( $\mu\text{m}$ )	Bunches
HL-LHC	2.3	2.1	2760
Achieved	1.15	2.5	2760
	$N$ ( $10^8$ ions/b)	$\epsilon_{x,y}$ ( $\mu\text{m}$ )	Bunches
HL-LHC	1.9	1.5	1248
Achieved	2.0	1.5	648

being installed during the Long Shutdown 2 (LS2: 2019 to 2020).

To define and adequately prepare the LS2 installation activities, as well as to ease the related workload, numerous project related activities had to be carried out during Run 1, LS1 and Run 2 (2010 - 2018), specifically:

- Beam simulation studies and machine measurement campaigns have been carried out to validate the assumptions made for the beam parameters as well as to explore the performance boundaries of the different machines and define strategies to cope with the various performance limitations (e.g. space charge, electron cloud, machine impedance);
- RF equipment, injection/extraction/protection devices, power supplies, beam instrumentation, etc. have been designed, built or procured and, where possible, installed during LS1 or the (Extended) Year-End-Technical-Stops – (E)YETS’s – and tested with beam;
- Cabling and decabling work was advanced compatibly with all the other maintenance activities foreseen during the yearly stops in terms of time and resources;
- All the civil engineering and infrastructures for the new buildings, as well as surface installation works,

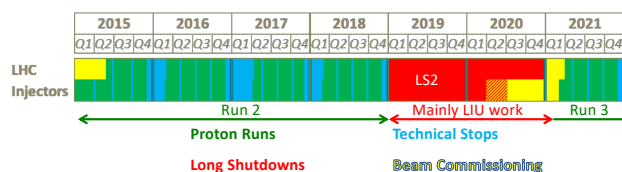


Figure 1: LHC (upper row) and injectors (lower row) operation schedule between 2015 and 2021.

\* Malika.Meddahi@cern.ch

were performed in parallel with the running machines, compatibly with availability of resources;

- Linac4 was commissioned and underwent reliability and quality runs from 2016 to 2018 [5]. Tests to qualify the new PSB injection scheme were performed in 2016 - 2017 [6].

At the end of the equipment installation phase, stand-alone beam commissioning in the new or upgraded injectors will start in Q2 of 2020 for Linac4, in September 2020 in the PSB, in December 2020 in the PS and in January 2021 in the SPS. The detailed schedule of the restart of the ion injectors chain is being finalised.

Commissioning of LIU beams will take place in 2020 - 2021 for the Pb ion beams, as the full beam performance is already required for the HL-LHC Pb-Pb ion run at the end of 2021. The proton beam commissioning up to the LIU beam parameters will be gradually performed during Run 3 (2020 - 2024) to be ready after Long Shutdown 3 (LS3). This strategy will allow performing any further hardware corrective actions during the Run 3 technical stops or LS3, if needed, as discussed more in detail ahead in this paper.

## LIU BASELINE FOR PROTONS

To fulfill the HL-LHC requirement of integrated luminosity, the proton injectors are expected to produce trains of 288 bunches (4x72) with 25 ns bunch spacing and with about double bunch intensity and 2.4 larger brightness at the SPS exit with respect to present values (Table 1, top two rows).

To reach this goal, the LIU baseline includes [3]:

- Replacement of Linac2 with Linac4. The H<sup>-</sup> charge exchange injection into the four rings of the PSB at 160 MeV will produce beams with twice higher brightness than presently achieved out of the PSB [7];
- Increase of the kinetic energy at injection into the PS from 1.4 to 2 GeV. In combination with optimized longitudinal beam parameters at the PSB-PS transfer [8], this will allow reaching the LIU beam brightness target at unchanged space charge tune spread. The higher PSB extraction energy requires an increase of the PSB magnetic fields as well as the replacement of its main power supply and RF systems;
- Installation of longitudinal feedback against the longitudinal coupled bunch instabilities, reduction of the impedance of the 10 MHz RF system and implementation of the multi-harmonic feedback systems on the high frequency RF systems. These interventions are needed to increase the threshold of the longitudinal coupled bunch instabilities that presently limit LHC beams in the PS. The first and third item have been already implemented in the PS and, together with the use of the 40 MHz RF system as Landau RF system over a part of the PS cycle, have demonstrated that the PS can reliably produce the LIU target intensity;

- Upgrade of the SPS 200 MHz RF system. The RF power will be increased by adding two new 200 MHz power plants, changing to a pulsed operation mode for increasing the peak RF power, and rearranging the 200 MHz cavities to reduce their impedance and the beam loading effect with LHC-type beams. A further reduction by a factor 3 of the High Order Modes (HOM) will be achieved through the installation of specially designed couplers. A new low-level RF for the 200 MHz RF system will be also implemented, which will allow more flexibility, beam loss reduction and new RF beam manipulations;
- Shielding of the focusing quadrupole (QF) flanges and a-C coating of the attached vacuum chambers. The goal is to increase the threshold for longitudinal beam instabilities and alleviate electron cloud transverse instabilities. Due to the limited a-C coating, however, beam induced scrubbing is also expected to be required for the production of the target LIU beams;
- Upgrade of injectors protection devices and a new SPS main beam dump to cope with the larger beam intensity and brightness. The SPS extraction protection, transfer line stoppers and collimators will be either exchanged, or new interlocking systems will be added.
- Upgrade of an important fraction of the beam measurement monitors, vacuum systems, and general services to comply with the performance and reliability targets.

After the implementation of the LIU upgrades, the beam parameters expected at LHC injection will exactly match the HL-LHC target values reported in Table 1 for the LHC standard beam (trains of 72 bunches at the PS exit). This can be illustrated visually in a so-called *limitation diagram*, as shown in Fig. 2: in the beam parameter space of transverse emittance versus bunch intensity at SPS extraction, all the boundaries for intensity and brightness limitations in the PSB, PS and SPS are plotted and the inaccessible regions are shaded. The best achievable parameter set corresponds to the point with the highest intensity and lowest emittance in the non-shaded area. As can be seen, the achievable beam parameters for the LHC standard beam match exactly the HL-LHC target values. The measured points from Run 2 are also plotted, highlighting the important challenge for the LIU project [9].

It should be mentioned that the standard beam remains the type targeted by HL-LHC to fulfil its integrated luminosity goal over the HL-LHC run [1]. Due to the LIU improvements, also other LHC beam types will benefit and see their performance improved in post-LS2 operation. For example, both the Batch Compression Merging and Splitting scheme (BCMS) [10], which results in trains of 48 bunches out of the PS, and the 8b+4e beam, made of trains of 56 bunches from the PS arranged in alternating sequences of 8 bunches and 4 gaps [11, 12], have the potential to be produced with ca. 20% higher brightness with respect to the standard beam, at the

expense of lower numbers of bunches in LHC. These beams are considered by HL-LHC as alternatives in case mitigation against unwanted emittance blow up and/or electron cloud effects in the LHC is needed.

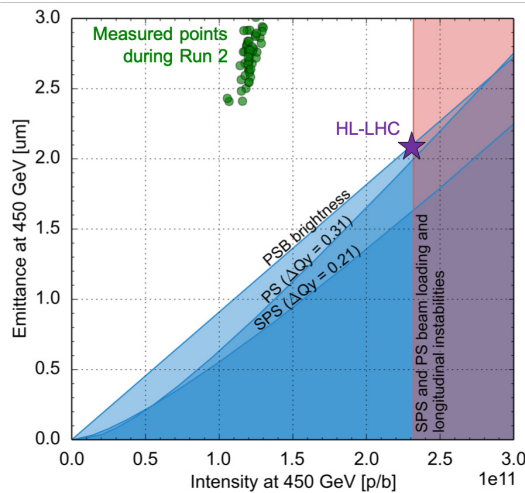


Figure 2: Limitation diagram for LHC standard 25 ns beam. The HL-LHC target (purple star) matches the best achievable LIU parameters. Measured points from Run 2 are also displayed (green).

On the path to define and implement the means to achieve the target beam parameters, several lessons have been learned, which have steered and re-prioritized the activities within the LIU project and should be kept in mind for future operation. Two notable examples are described below.

In 2018, 25 ns standard beams with the desired bunch intensity of  $2.6 \times 10^{11}$  p/b have been successfully and reproducibly produced at the PS extraction (although the transverse emittance is still more than twice the target value). This achievement has been made possible only thanks to the installation of the broadband Finemet cavity in the PS and its deployment during Run 2. It acts as the kicker for the longitudinal feedback together with other stabilising means to combat longitudinal coupled bunch instabilities on the ramp and at flat top. Figure 3 shows how the bunch intensity at the PS extraction was gradually ramped up from 2015 to 2018 as a combined result of additional RF improvements and operational optimisation [13]. As a mitigation if the target intensity could not be attained, the option of adding a Landau cavity in the PS was also actively pursued in 2017 - 2018, to be ready for inclusion in the project baseline in case of confirmed need. This experience has clearly shown that 1) the learning curve to operate new beam parameters with new equipment can exhibit a gentle rise in machine development mode; and 2) though eventually not needed in the baseline, the PS Landau cavity still serves the purpose to remain a post-LIU option, if Run 3 operation will call for lower longitudinal emittances from the PS.

The LIU project had originally amorphous carbon (a-C) coating of all the SPS dipole and quadrupole chambers in the baseline in order to suppress a large fraction of the elec-

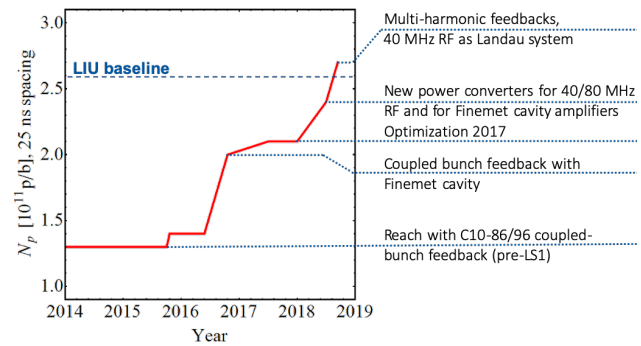


Figure 3: Evolution of bunch intensity in the PS over Run 2.

tron cloud inside the machine. However, after the post-LS1 scrubbing experience for nominal LHC beams and the first successful scrubbing runs even with higher intensity LHC beams at 26 GeV/c already in 2015, it was decided to descope the coating to just one machine sextant and mainly rely on beam induced scrubbing also for the target beam parameters. As the scrubbing efficiency was also confirmed in the high intensity runs of 2017 - 2018, even the a-C coating of one sextant was further descoped in May 2018 during an exercise of budget reduction. Only the a-C coating of the QF chambers and some new drift chambers has been finally retained. Meanwhile, as the longitudinal coupled bunch instabilities along the cycle and at flat top had been clearly identified as responsible for limiting the bunch intensity at extraction to  $2 \times 10^{11}$  p/b in the SPS, a campaign of impedance identification and reduction was pursued within LIU to extend the intensity reach of the project to its target value. Therefore, the shielding of the QF flanges and re-design of the HOM couplers for the 200 MHz cavities were included in the project baseline in 2016.

## LIU BASELINE FOR IONS

The target HL-LHC integrated luminosity with Pb-Pb in the post-LS2 era (ca.  $3 \text{ nb}^{-1}/\text{year}$  over four runs until 2029) can be met if the parameters of the Pb beam at the SPS extraction match the values in Table 1.

Thanks to an intensive campaign of machine studies and additional instrumentation installed in Linac3 and LEIR, which required an important temporary refocus of priorities and reshuffle of resources within the LIU project, the overall performance and reliability of the Pb ion injection chain has steadily improved during Run 2 with respect to previous runs. As a consequence of the higher current from Linac3, optimised transfer and injections into LEIR, and mitigation of space charge at RF capture in LEIR, the intensity extracted from LEIR has more than doubled over Run 2 (see Fig. 4). In the SPS the overall transmission has been also improved and the batch spacing at injection has been reduced to 150 ns. Globally, as reported in Table 1, the single bunch parameters achieved in 2018 at the SPS extraction already match the HL-LHC desired values, and even include a 5% margin for the additional losses expected with the future RF manipulations.

Content from this work may be used under the terms of the CC BY 3.0 licence (© 2019). Any distribution of this work must maintain attribution to the author(s), title of the work, publisher, and DOI THXPLM1 3388

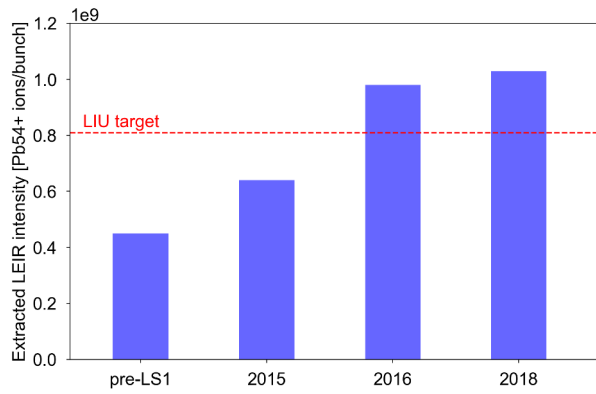


Figure 4: Evolution of extracted intensity in LEIR cycle since before LS1. The LIU target value is also displayed.

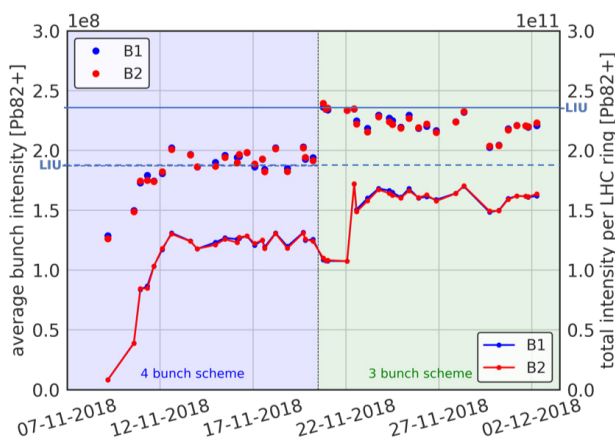


Figure 5: Average bunch intensity (points and left vertical axis) and total beam intensity (solid lines and right vertical axis) per LHC fill as a function of time during the 2018 Pb-Pb run. The LIU goals for both are also shown as horizontal lines (dashed for bunch intensity and solid for total beam intensity).

This is also displayed in Fig. 5, in which both the average bunch intensity and total beam intensity per LHC fill are plotted as a function of time, when looking at the first half of the run (labeled *4 bunch scheme*). In addition, an alternative filling scheme for LHC was set up and operationally used in the 2018 Pb-Pb run, based on the production of three bunches in LEIR and batch compression to 75 ns before the PS extraction. This scheme had the advantage of packing a higher number of bunches in LHC (733 instead of 648), each with 10% higher intensity. This is visible in Fig. 5, second half of the run (labeled *3 bunch scheme*). Using this scheme for luminosity production in 2018 demonstrated experimentally the potential to achieve 70% of the HL-LHC integrated luminosity target found with calculations [14, 15].

The remaining LIU item to be implemented for ions is the momentum slip stacking in the SPS to allow the transfer of 7 trains spaced by 100 ns, each train being made of 8 bunches

spaced by 50 ns, to the LHC. In this configuration, 1248 bunches can be injected into the LHC. The momentum slip stacking in the SPS depends on the full deployment of new LLRF capabilities for the 200 MHz RF system, expected to be ready by September 2021, and its feasibility has been proved in simulations [16]. In preparation for this mode of operation, dedicated machine studies were conducted in 2018 [17]. It was found that a radial displacement by 20 mm at 300 GeV (energy plateau chosen for slip stacking) does not lead to losses for the ion beam, which suggests that there would be enough momentum aperture to move only one half of the beam during the slip stacking. Unfortunately, longitudinal instabilities were observed after transition crossing and at 300 GeV, which means that stabilisation techniques (i.e. 800 MHz, longitudinal emittance blow up) will have to be studied in simulations during LS2, and then tested and commissioned in 2021.

### LIU BEAM COMMISSIONING IN RUN 3

To prepare for the restart of the injectors in 2020 - 2021, individual system tests will take place during the shutdown period, followed by periods of hardware commissioning, which will include also the newly installed LIU equipment. In the following, blocks of variable length for stand-alone beam commissioning have been allocated for each accelerator of the injection chain. The details can be found in the general LS2 master plan [18].

The timeline for the commissioning of the LIU beams in Run 3 is shown in Fig. 6. During 2020 - 2021, all the pre-LS2 beams as documented through the existing beam documentation (for both protons and Pb ions) will have to be recovered and will serve their physics users, as they gradually come online. Conditioning of new equipment and general machine scrubbing will be needed in the SPS to recover the beam quality already for pre-LS2 beam intensity. In order to assess the state of the machines after LS2, reference measurements will also be conducted in all machines (e.g. physical aperture, impedance) and compared with the pre-LS2 data. It should not be forgotten that the general injector operation in these two years will be challenging due to the fact that all major new LIU systems will have to be commissioned with beam and operationally integrated (though not fully exploited), e.g. the new  $H^-$  charge exchange injection into the PSB, the new PSB main power supply and RF system, the PSB-PS transfer at higher energy, the upgraded 200 MHz RF system in the SPS (both for power and LLRF), the new SPS beam dump. In addition to all of this, the Pb ion beams will have to be recovered as in 2018 (both 4 and 3 bunch schemes) and the momentum slip stacking in the SPS will have to be commissioned between September and November 2021 with the important challenges highlighted in the previous section. As from 2022, the intensity ramp up of the LHC proton beams can begin. During 2022, one can expect a combined intensity and brightness ramp up, with the bunch intensity at the SPS extraction progressively increased from the pre-LS2  $1.3e11$  p/b to the target  $1.8e11$  p/b while the

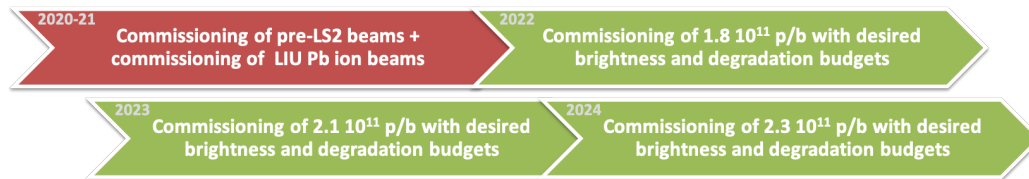


Figure 6: Gradual intensity ramp up to the LIU beam intensity over Run 3.

transverse emittance is tentatively decreased from the initial  $2.5 \mu\text{m}$  to  $1.7 \mu\text{m}$ . New territory will be explored in terms of beam parameters. In fact,  $2e11$  p/b were already produced up to PS extraction and even tested at SPS injection during Run 2. However, this intensity needs the upgraded SPS main RF system to be accelerated in trains longer than 12 bunches. The SPS will have to be scrubbed for this new range of intensities and the already encountered horizontal and longitudinal instabilities at 26 GeV/c will have to be overcome in order to ensure beam losses within 10% in the SPS, as required for operational deployment. Therefore, a stabilisation strategy is being developed during LS2, also relying on the search of the instability sources, and will have to be tested and demonstrated. It should be mentioned that additional beam requests from physics (e.g. light ions) may also take significant time and resources, should these requests be approved.

In 2023 - 2024 the injected intensity into the SPS will have to be further ramped up from 2 to  $2.6e11$  p/b at constant brightness, expecting an extracted intensity from  $1.8$  to  $2.3e11$  p/b, see Fig. 6. Apart from the needed additional SPS scrubbing, new and yet unknown limitations might emerge and require additional actions to achieve the target beam parameters. Addressing these limitations and implementing measures to overcome them is the subject of the next section.

## BEYOND THE LIU BASELINE

In the course of the LIU project, several additional items were considered at different stages for the achievement of the LIU beam parameters, but were then dropped from the baseline because of low benefit over cost ratio. A complete inventory of these options can be found in [19]. However, some of them could still be revived in the post-LIU era for some specific failure scenarios. In the following we will report on the main items, to be kept in mind during Run 3, should any of the associated failure scenarios indeed occur.

**Impedance reduction of the extraction kickers in the PSB.** Horizontal instabilities occurring along the PSB cycle are caused by the unmatched terminations of the extraction kickers and are cured by the transverse feedback in routine operation. Future operation might suffer due to the 160 MeV injection, which is a critical energy for the instability, and the acceleration of higher intensity beams for ISOLDE.

**Landau cavity in the PS.** While the LIU beam intensity has been already proved at the PS extraction, the implementation of a Landau cavity would increase the stability margin and give more potential to decrease the longitudinal emit-

tance out of the PS, which might directly benefit the SPS losses at injection energy if they are too high.

**a-C coating of the dipole chambers in the SPS.** Beam induced scrubbing has been shown to work for high intensity in the SPS, however large tune shifts along the batches and instabilities have been also observed, which might be due to electron cloud and limit future operation.

**Further SPS impedance reduction.** In addition to the shielding of the QF flanges and further suppression of the HOMs in the 200 MHz cavities, the SPS might benefit from reducing the impedance of the injection kickers (both for equipment heating and longitudinal stability) as well as from shielding the defocusing quadrupole (QD) transitions and the vacuum valves (mainly for longitudinal stability).

**Wideband feedback system for the SPS.** A prototype system was installed in the SPS and proved to work against vertical instabilities both in single and multi-bunch operation. It could be used against potential future vertical instabilities caused by persisting electron cloud, or against the horizontal instabilities observed in high intensity operation.

**Collimation system in the SPS.** A two-stage collimation system has been designed for the SPS to intercept large momentum particle losses. It could be necessary in operation with LIU parameters and higher loss regime to reduce machine equipment irradiation and activation.

## CONCLUSIONS

The LIU project is currently in its final phase, with most of the new equipment installation and commissioning taking place during LS2. The project baseline in terms of design and construction of new upgraded equipment has been built such that the target LIU beam parameters match the HL-LHC request for both protons and ions. This has been achieved thanks to the constantly improving machine operation and beam modelling for all injectors and to the careful steering of the project priorities towards the most critical items according to the evolving level of understanding, within the given constraints of time, resources and budget. A solid ramp up strategy has been established for the LIU beam parameters and will be put in place during Run 3, based on a gradual exploitation of the newly installed hardware to produce baseline LIU beams in their yet unexplored parameter range by the end of 2024 for post-LS3 readiness. Although risks still exist for the achievement of the target beam parameters, mitigation schemes and/or post-LIU options have been prepared within the project, as a pathway for successful luminosity production in the HL-LHC era.

## REFERENCES

- [1] R. Tomás *et al.*, “Beam parameter requirements from HL-LHC”, presented at the LHC Injectors Upgrade (LIU) Workshop, Montreux, Switzerland, Feb. 2019, unpublished.
- [2] M. Benedikt *et al.*, “Summary of Session 7: Accelerators and non LHC Experiment Areas Consolidation up to LS3”, in *Proc. Chamonix 2014 Workshop*, Chamonix, France, Sept. 2014, CERN-ATS-2015-002, pp. 31-32.  
doi:10.5170/CERN-2015-002.31
- [3] J. Coupard *et al.*, “LIU Technical Design Report - Volume I: Protons”, CERN, Geneva, Switzerland, Rep. CERN-ACC-2014-0337, Dec. 2014.
- [4] J. Coupard *et al.*, “LIU Technical Design Report - Volume II: Ions”, CERN, Geneva, Switzerland, Rep. CERN-ACC-2016-0041, April 2016.
- [5] A. M. Lombardi, “Linac4: From Initial Design to Final Commissioning”, in *Proc. IPAC'17*, Copenhagen, Denmark, May 2017, paper TUYA1, pp. 1217-1222.  
doi:10.18429/JACoW-IPAC2017-TUYA1
- [6] W. J. M. Weterings, *et al.*, “First experience with carbon stripping foils for the 160 MeV H- injection into the CERN PSB”, AIP Conference Proceedings 1962, p. 030003, 2018,  
doi:10.1063/1.5035520.
- [7] E. Benedetto *et al.*, “CERN PS Booster upgrade and LHC beams emittance”, in *Proc. of IPAC2015*, Richmond, VA, May 2015, paper THPF088, pp. 3897-3900.  
doi:10.18429/JACoW-IPAC2015-THPF088
- [8] G. Rumolo *et al.*, “Expected performance in the injectors at 25 ns without and with Linac4”, in *Proc. Review of LHC and Injector Upgrade Plans (RLIUP) Workshop*, Archamps, France, Oct. 2013, CERN-2014-006, pp. 17-24.  
doi:10.5170/CERN-2014-006.17
- [9] H. Bartosik *et al.*, “Injectors Beam Performance Evolution during Run 2”, presented at 9th LHC Operations Evian Workshop, Evian, France, Jan. - Feb., 2019, unpublished.
- [10] R. Garoby, *IEEE Transactions on Nuclear Science*, vol. 32, no. 5, pp. 2332-2334, Oct. 1985,  
doi:10.1109/TNS.1985.4333903
- [11] R. Garoby, “Multiple bunch splitting in the PS: Results and Plans”, Rep. CERN/PS 2001-004 (RF), Feb. 2001.
- [12] H. Damerau *et al.*, “LIU: Exploring alternative ideas”, in *Proc. Review of LHC and Injector Upgrade Plans (RLIUP) Workshop*, Archamps, France, Oct. 2013, CERN-2014-006, pp. 127-138.  
doi:10.5170/CERN-2014-006.127
- [13] A. Lasheen *et al.*, “PS intensity reach and longitudinal parameters after LIU”, presented at the LHC Injectors Upgrade (LIU) Workshop, Montreux, Switzerland, Feb. 2019, unpublished.
- [14] H. Bartosik *et al.* “LIU-SPS: Protons and Ions”, presented at LHC Performance Workshop Chamonix 2018, Chamonix, France, Jan.-Feb. 2018, unpublished.
- [15] H. Bartosik *et al.*, “Transverse beam quality and stability in the SPS (protons and ions)”, presented at the LHC Injectors Upgrade (LIU) Workshop, Montreux, Switzerland, Feb. 2019, unpublished.
- [16] D. Quartullo, “Simulations of RF beam manipulations including intensity effects for CERN PSB and SPS upgrades”, CERN, Geneva, Switzerland, Ph.D. thesis, CERN-THESIS-2019-006, Feb. 2019.
- [17] E. Shaposhnikova *et al.*, “Longitudinal beam quality and stability in the SPS (protons and ions)”, presented at the LHC Injectors Upgrade (LIU) Workshop, Montreux, Switzerland, Feb. 2019, unpublished.
- [18] J. Coupard *et al.*, “Master schedule of the Long Shutdown 2 (2019-2020)”, Rep. CERN EDMS 1687788, Jan. 2019.
- [19] G. Rumolo, “Beyond LS2: spares, NCs and upgrades after LS2”, presented at the LHC Injectors Upgrade (LIU) Workshop, Montreux, Switzerland, Feb. 2019, unpublished.