

# LUMINOSITY MEASUREMENT AT DAFNE FOR CRAB WAIST SCHEME

M. Boscolo, F. Bossi, B. Buonomo, G. Mazzitelli, F. Murtas, P. Raimondi, G. Sensolini  
(INFN/LNF, Via E. Fermi 40 - 00044, Frascati, RM, Italy)

M. Schioppa

(Gruppo Collegato INFN, Via P. Bucci - 87036, Rende, CS, Italy)

F. Iacoangeli, P. Valente

(INFN-Roma, P.le Aldo Moro 5, Roma, Italy)

N. Arnaud, D. Breton, A. Stocchi, A. Variola, B. Viaud

(LAL, Univ Paris-Sud, CNRS/IN2P3, Orsay, France)

Paolo Branchini

(INFN Roma3, Via della Vasca Navale, 84 - 00146, Roma, Italy)

## Abstract

Since the beginning of 2008 the DAFNE complex started to test the "crabbed scheme" to improve the luminosity performance of the accelerator. In order to ensure a fast, accurate and absolute measurement of the luminosity and to fully understand the background conditions, the new interaction region has been equipped with three different luminosity monitors: a Bhabha calorimeter, a Bhabha GEM tracker and a gamma bremsstrahlung proportional counter. The detectors design, construction, and performance, as well as the first measurements performed at DAFNE during the crab waist commissioning are here presented. Data are also compared with the Monte Carlo simulations of the full setup. First results acquired during the SIDDHARTA run are supposed to be presented.

## INTRODUCTION

The promising idea to enhance the luminosity with the introduction of a large Piwinski angle and low vertical beta function compensated by crab waist [1], will be a crucial point in the design of future factory collider [2], where the luminosity is the fundamental parameter. The DAFNE accelerator, located in the National Laboratory of Frascati (INFN), optimized for the high production of  $\Phi$  mesons ( $\sqrt{s}=1020$  MeV), has been modified during last year to test the crab waist sextupoles compensation scheme. Since fall of 2007 the machine has restarted operations, and at the beginning of February various luminosity detectors have been put in operation in order to guarantee an accurate measurement of the luminosity and of backgrounds, as well as to provide powerful and fast diagnostics tools for the luminosity improvement.

Three different processes are used to measure the luminosity at DAFNE:

- The Bhabha elastic scattering  $e^+e^- \rightarrow e^+e^-$ ; it has a very clean signature (two back-to-back tracks); the available angle is limited due to the presence of the low- $\beta$  quadrupoles, however, in the actual polar angle range covered by our calorimeters,  $18^\circ$ - $27^\circ$ , the expected rate ( $\sim 440$  Hz at a luminosity of  $10^{32}$  cm $^{-2}$

s $^{-1}$ ) is high enough and the backgrounds low enough to allow an online clean measurement.

- The very high rate  $e^+e^- \rightarrow e^+e^-\gamma$  (radiative Bhabha process); it has the advantage that 95% of the signal is contained in a cone of 1.7 mrad aperture, but it suffers heavily from beam losses due to: interactions with the residual gas in the beam-pipe, Touschek effect, and particles at low angles generated close to interaction region (IR).
- The resonant decay  $e^+e^- \rightarrow \Phi \rightarrow K^+K^-$ ; a rate of about 25 Hz at  $10^{32}$  is expected in the SIDDHARTA experiment monitor at  $\sim 90^\circ$  [3].

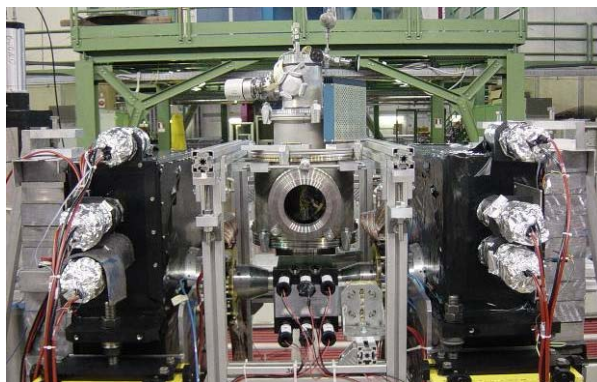


Figure 1: the SIDDHARTA preliminary setup installed at DAFNE. The Bhabhas calorimeters (black boxes) are visible on the left and right of the interaction region.

## BHABHA MONITOR

The Bhabha monitors consist of two different detectors, a 4-module sandwich calorimeter, made of lead and scintillator, and two triple GEM annular trackers.

### Calorimeters

Four modules of calorimeters surround the final permanent quadrupole magnets, located at a distance of 32.5 cm on both sides of the interaction region (IR), as shown in Fig. 1. They cover an acceptance of  $18^\circ$ - $27^\circ$  in polar angle, and are segmented in azimuthal angle in five sectors,  $30^\circ$  wide. The choice of not instrumenting  $1/6$  of

the acceptance, i.e. the  $\pm 15^\circ$  region, was dictated by the consideration that most of the machine backgrounds are expected on the machine plane. Each sector is a sandwich of 12 trapezoidal tiles of 1cm thick scintillator, wrapped with Tyvek\* paper, alternated with lead plates: eight 5 mm thick plates towards the interaction point and three 1cm thick plates in the back part, lead plates for a total thickness of 19 cm. This choice was driven by the compromise between the need of having a good longitudinal containment of 510 MeV electron showers (the total depth corresponds to about  $12.5 X_0$ ), and the necessity of having a detector not exceeding the permanent quadrupole length.

The 240 scintillator tiles have been produced with injection-molded technique in IHEP, Protvino. Each tile has three radial grooves on one face, 2 mm deep (one in the middle and two 1 cm from the edge of the tile) inside which wavelength shifting (WLS) fibers of 1 mm diameter are placed; the 36 WLS fibers, are collected to an optical adapter to fit the photocathode of 20 Photonic-Philips XP 2262B photomultipliers, read by a prototype data acquisition system of the KLOE2 experiment: the analog signals are actively splitted to be digitized by a constant fraction discriminator for time measurement (using the KLOE TDC, 1.04 ns resolution), and for the pulse height measurement by the KLOE charge ADC, with a 0.25 pC resolution.

All modules has been tested at the DAFNE Beam Test Facility [8] where an energy resolution of  $14\% \sqrt{E}(\text{GeV})$  has been measured.

### *The triple GEM tracker*

In front of each calorimeter, at a distance of 18.5cm from the IR, a ring of triple-GEM detectors [4] is installed around the beam pipe. The two GEM trackers are divided in two units, with an half-moon shape; the top (bottom) half covers azimuthal angles between  $14^\circ$  and  $166^\circ$  ( $194^\circ$  and  $346^\circ$ ) respectively. Each of the four GEM units is segmented into 32 pads: eight cells in azimuth (covering  $19^\circ$  each) are arranged in four rings of equal radial extension. When a charged particle crosses the 3 mm drift gap, it generates electrons that will be multiplied by the three GEM foils separated by 2/1/2 mm. Each of the GEM planes is made of a thin ( $50\mu\text{m}$ ) kapton foil sandwiched between two copper clads and perforated by a dense set of holes ( $70\mu\text{m}$  diameter,  $140\mu\text{m}$  pitch).

As a high potential difference (about 400 kV) is applied between the copper sides, the holes act as multiplying channels and the gain of each layer is about 20 (and hence roughly 8,000 in total).

The GEM trackers, as well as the gamma monitors, have been included into the main DAQ system.

## GAMMA MONITOR

Two gamma monitor detectors are located 170 cm away from the IR, collecting the photons radiated by electron or positron beam.

The detectors replace the gamma monitors previously installed in DAFNE [5] and are now made of four  $\text{PbWO}_4$  crystals (squared section of  $30 \times 30 \text{mm}^2$  and 110mm high) assembled together along z, in order to have a 30 mm face towards the photon beam, and a total depth of 120 mm corresponding to about  $13X_0$ . Each crystal is readout by a Hamamatsu R7600 compact photomultiplier. Each of the crystal signals is splitted: one half is sent to the charge ADC of the KLOE2 data acquisition system, while the other is sent to an analog mixer. The analog sum of the four crystals is then discriminated and the counts are read by the DAFNE Control system, providing a prompt estimate of the luminosity for machine optimization.

Because of the boost introduced by the beam crossing angle, the trajectories of the photons are shifted towards the inner side (along x coordinate) of the machine; the gamma monitors and GEM trackers are then placed along the beam pipe at  $x = -5\text{cm}$  and rotated by  $4^\circ$  in the horizontal plane with respect to the beam axis.

Thanks to the high rate, those detectors are mainly used as a fast feedback for the optimization of machine luminosity versus background, more than providing a measurement of the luminosity, since the relative contribution of background is changing with the machine conditions. However, on the short time scale and as relative luminosity monitors, those counters have demonstrated to be extremely useful.

## SIMULATION

In order to correct the Bhabha event rate measured using the calorimeters and the GEM trackers for the detectors' acceptance and selection efficiency, we developed a full simulation of the whole experimental set-up, based on the GEANT3 package. This includes all the materials and fields present in the interaction region as well as a simulation of the detectors response.

The BHWIDE package is used to generate Bhabha events with a full treatment of the radiation [6].

The contamination due to the Touschek background is investigated by interfacing an ad hoc generator [7] with the simulation.

Particular care was given to the implementation in the simulation of the materials and fields distribution all along the interaction region, since this impacts directly on the background level in the calorimeters as well as on the signal detection efficiency of the gamma monitors.

The simulation predicts a measured Bhabha event rate of  $\sim 440 \text{ Hz}$  when the luminosity equals  $10^{32} \text{ cm}^{-2} \text{ s}^{-1}$ . The rate actually measured at the IP is compared with this number to derive the actual luminosity. The simulation is also used to evaluate the systematic uncertainties affecting this measurement. It's dominated by the alignment of the calorimeter and of the conical shielding in front of it ("Soyuz"), as well as by the definition of the

\* Tyvek™ is a trademark of DuPont company.

energy threshold. Also the presence of the SIDDHARTA detector is taken into account. For a preliminary measurement involving only the calorimeters, an 11% uncertainty should be quoted. It drops to 7% when the GEMs are also in operation.

We also used the simulation to determine the optimal location for the GEMs. They're shifted in the horizontal plane by 5 mm in the direction of the boost to compensate for the loss of back-to-back-ness caused by this boost. Finally, we based on the simulation to design the part of the beam-tests devoted to the measurement of the attenuation length of the scintillating tiles. This constant has to be precisely known for the simulation to describe accurately the energy reconstruction, thus the signal efficiency.

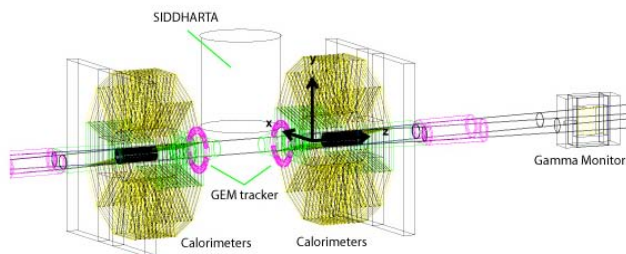


Figure 2: GEANT simulated setup

## RESULTS

The four calorimeters, the GEM trackers and the crystal gamma detectors are acquired by KLOE2 farm data acquisition prototype. The trigger condition (TIFREE) consists of the coincidence of two opposite, upside down modules when the energy released in the modules is above 200MeV. Data can be acquired for offline analysis when particular studies have to be performed. All single and coincidence rate are acquired by the DAFNE control system, in order to provide a fast reading of luminosity and background condition very useful for machine parameters optimization.

Various analyses of trigger condition, luminosity and background have been performed in order to check the trigger efficiency and background contamination in the luminosity evaluation. For this reason an online filtering process has been implemented on the DAQ farm, providing an offline estimate of the rate (T2FARM), corrected by the percentage of background contamination in the coincidence. This correction is estimated analyzing blocks of 1000 events, and by looking at the time distribution of the time of the two triggering modules. The difference of the arrival time of a Bhabha candidate for the couple of triggering modules, as selected by the TIFREE hardware trigger. As expected, a Gaussian distribution peaked at  $\Delta t=0$  is clearly visible. Superimposed on this narrow Gaussian ( $\sigma \approx 2$  counts), a flat distribution due to background is also present. Indeed, the narrow peak completely disappears when the beams are longitudinally separated. The width of the background

flat distribution is determined by the duration of the digital signals building the coincidence ( $\approx 25$  ns).

In order to isolate genuine Bhabha's, the online filter selects events in a  $\Delta t = \pm 3 \sigma$  window ( $\pm 6$  counts). In order to estimate the amount of background beneath the peak, events in the sideband (12 counts wide) are counted and subtracted.

## CONCLUSIONS

The diagnostics installed on the new DAFNE IR in order to measure luminosity for the test of the new crab waist scheme, started to operate at the beginning of February 2008 and is collecting the first encouraging results from the machine.

All systems showed very good performance and fully achieved the design parameters. A total systematic uncertainty on the luminosity measurement of 11% can be estimated.

Detectors have been fully implemented in the machine controls, and data are available for the community on word wide web DAFNE accelerator page.

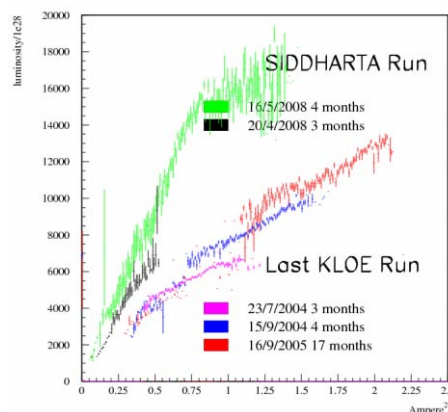


Figure 3: DAFNE performance (luminosity vs current product) during the tree major optics steps.

## ACKNOWLEDGEMENTS

We would like to thank L. Iannotti, V. Romano and the LNF SSCR service for the mechanical works, and all the electronic staff of the Accelerator Division; G Corradi, M. Pistilli, D. Tagnani for the GEM electronics and detector construction. We also would like to thank W. Placzek for the support on BHWIDE code.

## REFERENCES

- [1] D. Alesini et al, LNF-06/033 (IR), 2006.
- [2] M. Bona et al, INFN/AE-07-2, SLAC-R-856, LAL 07-15, 2007
- [3] Marton et al, Proceedings to the XLV International Winter Meeting on Nuclear Physics, Bormio, Italy, 2007
- [4] M. Alfonsi, et al. IEEE 53(1): 322-325 2006
- [5] G. Mazzitelli et al, NIM.A486:568-589,2002.
- [6] S. Jadach et al, Phys.Lett. B390 (1997) 298-308
- [7] M. Boscolo et al, PAC2007, Albuquerque, New Mexico, USA, 2007.
- [8] A. Ghigo, et al, NIM A 515 (2003) 524-542