work must

HIGH POWER TEST OF THE LEAF-RFQ*

L. LU[†], W. MA, Y. H. ZHAI, Y. YANG, L.P. Sun, L. B. Shi, L.T. Sun, Y. He, H.W. Zhao Institute of Modern Physics (IMP), CAS

509 Nanchang Rd., Lanzhou, Gansu, China

Abstract

An 81.25 MHz continuous wave (CW) radio frequency quadrupole (RFQ) accelerator has been designed and fabricated for the Low Energy Accelerator Facility (LEAF) by the Institute of Modern Physics (IMP) of the Chinese Academy of Science (CAS). The operation frequency is 81.25 MHz and the inter-vane voltage is a constant of 70 kV. It took about 44 hours continuous conditioning to reach RF power of 75 kW which is 1.1 time of the maximum designed operation power, and the successful CW acceleration of 150 euA He⁺ beam to the designed energy of 0.5 MeV/u. Both the results of the high power test and the beam test will be reported in this paper.

INTRODUCTION

The LEAF project was launched as a pre-research facility for the high intensity Heavy Ion Accelerator Facility (HIAF) project and a heavy ion irradiation facility for material research at IMP [1, 2]. The LEAF will consist of a 2 mA U³⁴⁺ electron cyclotron resonance ion source, a low energy beam transport line, a CW 81.25MHz RFQ accelerator [3], a medium energy beam transport and an experimental platform for nuclear physics. The layout of the LEAF project is shown in Fig. 1. The LEAF-RFQ shown in Fig. 2 will operate as a CW injector with the capability of accelerating all ion species from proton to uranium from 14 keV/u up to 500 keV/u. The design goal is to design a compact type cavity with lower power loss and high operation stability. Considering the LEAF-RFQ will operate in CW mode, a four-vane structure is a better choice than four-rod type, because the four-vane structure is a more stable structure for water cooling. The PISLs structure is adopted to suppress the dipole effect. In addition, tuners and undercuts are used for frequency tuning and field flatness. The main parameters of the LEAF-RFQ are listed in the Table 1. In this paper, we report the results of the low power test and the high power test.

Table 1: Main Parameters of the LEAF-RFQ

Parameters	Value
A/q	7
Operation	CW/pulsed
Vane type	Four vane
Frequency (MHz)	81.25
Input energy (keV/u)	14
Output energy (MeV/u)	0.5
Inter-vane voltage (kV)	70
Kilpatrick factor	1.55
Peak current (emA)	2
Transmission efficiency (%)	97.2
Acceleration efficiency (%)	81.7
Length of vane (mm)	5946.92
Average radius of aperture (mm)	5.805

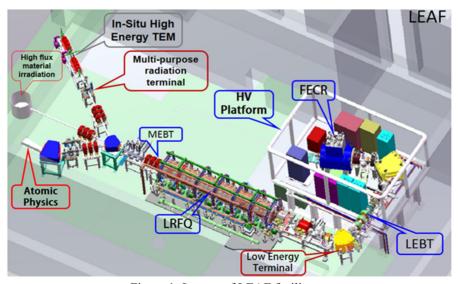


Figure 1: Layout of LEAF facility.

*Work supported by the NSFC under Grant No. 11427904, No. 11475232 and No. 11535016.

†luliang@impcas.ac.cn

Content from this work may be used under the terms of the CC BY 3.0 licence (©



Figure 2: Side view of installed RFO after full assembly on site.

LOW POEWR TEST

The LEAF-RFQ was assembled in the end of December of 2017, and the low power test was started in the early January of 2018. The low power tests and tuning of the whole cavity were carried out through three steps. Firstly, frequencies. O factor and fields were measured in the cavity with aluminum end-plates and aluminum tuners inserted into the cavity 26 mm, the same situation as the simulation. Secondly, through the tuning LRFQtuning (a code developed for LEAF RFQ tuning based on the Matlab), the depths of the tuners were adjusted to meet the requirements of frequency and fields. After a few iterations, a satisfactory resonant frequency and field distribution will be achieved. Lastly, the copper tuners with the final insertion and copper end-plates replaced aluminum those. This step was to check the resonant frequency and field distribution, meanwhile, the Q factor was measured.

The LEAF-RFQ low power test consists of each section test and the whole cavity test. The low power tests of single section were carried out to check the machining and brazing quality. The average frequency difference between the simulated and the measured after brazed is 10.15 kHz. The average frequency difference between the measured before brazed and after brazed is 23.35 kHz. Shown in Table 2, the low power test of the full length RFO showed that the final quadrupole mode frequency is 81.253 MHz which meets well with the design value of 81.25 MHz, the measured O factor is 16230 which is 90.3% of the simulated value and the measured frequency separation was 5.54 MHz which is enough for safe operation. Figure 3 shows the measured longitudinal field distributions of the quadrupole, two dipole fields in the cavity with two aluminum end-plates and copper tuners with the tuned tuners [4]. The relative error of the quadrupole field is less than 1% and the admixtures of the two dipole modes are within 1.5% of the quadrupole field. Therefore, the frequency and field distribution meet the operation requirement.

Table 2: Main Parameters of the LEAF-RFQ

Value
81.253
16230 (90.3%)
0.8
1.5
5.587




Figure 3: Measured O and D field of the LEAF-RFO

RF CONDITIONING AND BEAM **COMMISSIONING**

After installing the equipments of vacuum, couplers, cooling routers, ARC detectors and pick-ups, and connecting with two 60kW solid state type RF source, the RF commissioning was started from Feb. 3rd 2018 aiming to 75 kW (1.12 times of necessary power). With a base vacuum condition of ~1×10⁻⁵ Pa, it took about 44 hours continuous conditioning to reach goal of 75 kW.

The LEAF-RFQ was designed for $2 \le A/q \le 7$ ion acceleration, and the designed Kilpatrick factor was 1.54. the He⁺ beam was adopted for beam commissioning. The first pulse beam using 100 µA He⁺ ions passed the RFQ in Feb. 9th 2018. Under the condition of pulse beam, the beam energy was measured as 0.5 MeV which meet the designed value. And two hours late, the first CW He⁺ beam passed the RFQ. The current of the CW beam was measured as 150 µA. With supplying of correction magnet, the beam conditioning was restarted in June 1st 2018, the beam

transmission and acceleration efficiency was measured as 97.21% and 50.11%, respectively. The measured transmission agreed with the design, the acceleration efficiency is lower than the design because an upstream multi-harmonic buncher is not installed vet.

Shown in Fig. 4 and Fig. 5, in Sep. 5th 2018, the first N²⁺ beam was successfully accelerated 110 µ A up to the designed 500 keV/u with 97.97% transmission and 56.45% acceleration efficiency measured in pulse mode (5µs), and, the CW 110µA N²⁺ beam pass 15 minutes. The high current N²⁺ beam will be operated in one month when the multi-harmonic buncher is installed

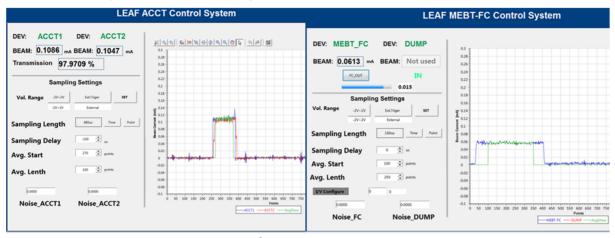


Figure 4: Measured signals of N²⁺ beam current form ACCTs and a Faraday Cup.

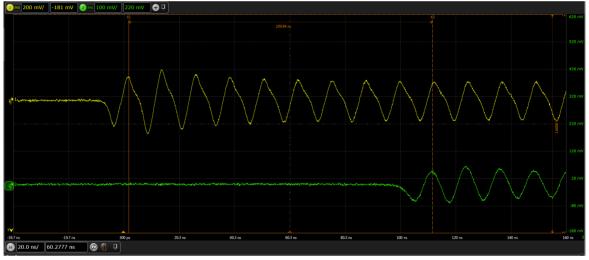


Figure 5: Measured signals of N²⁺ beam current form two BPMs.

CONCLUSION AND FUTURE PLAN

The LEAF-RFQ has been designed and simulated and the beam test was performed. The RFQ is an octagon fourvane type with 48 tuners and 12 pairs PISLs. It is about 6 m long with a good mode separation and a flat field distribution between inter-vanes. According to the high power test, several milestone goals have been achieved, such as the successful RF commissioning of LRFQ to its maximum designed power, and the successful CW acceleration of 150 eµA He⁺ beam to the designed energy $\stackrel{.}{=}$ of 0.5 MeV/u with 97.21% transmission. For the next, as N^{2+} has the A/q=7 close to U^{34+} , it will be used to test the performance of the RFO.

REFERENCES

- [1] Yang J, Xia J, Xiao G, Xu H, Zhao H et al., Nucl. Instr. Meth., vol. 317, pp. 263-5, 2013.
- [2] Li C, Sun LP, He Y et al., Nucl. Instr. Meth., vol. 729, pp. 426-33, 2013.
- [3] Wei Ma, L. Lu, Xianbo Xu, Liepeng Sun et al., Nucl. Instr. Meth., vol. 847, pp. 130-135, 2017.
- Wei Ma, L. Lu, Ting Liu, Longbo Shi et al., Nucl. Instr. Meth., vol. 901, pp. 180-188, 2018.