

RACETRACK MICROTRON FOR NONDESTRUCTIVE NUCLEAR MATERIAL DETECTION SYSTEM*

T. Hori[#], T. Kii, R. Kinjo, H. Ohgaki, M. Omer, H. Zen, Kyoto Univ., Uji, Kyoto 6110011 Japan
 R. Hajima, T. Hayakawa, JAEA, Tokai, Ibaraki 3191195, Japan
 I. Daito, M.Kando, H. Kotaki, JAEA, Kizugawa, Kyoto 6190215, Japan
 F. Sakai, Sumitomo Heavy Ind., Ltd., Nishitokyo, Tokyo 1888585, Japan

Abstract

A nuclear material detection system (NMDS) based on neutron / γ -ray hybrid approach has been proposed for the container inspection at sea ports [1]. While neutron is to be used for a fast pre-screening, quasi-monochromatic γ -ray beam from the laser Compton scattering (LCS) source will be used for an isotope identification on the precise inspection. Nuclear resonance fluorescence method will be employed for the isotope identification because of its superiority in high selectivity and in high penetration capability through the shielding objects. In the system a high energy electron beam of good quality is required for LCS. A racetrack microtron (RTM) is one of the most promising candidates as an electron source for such the practical use. Some adequate combinations of basic design parameters of RTMs over 200 MeV has been described.

INTRODUCTION

At present four 150 MeV RTMs are in operation in Japan [2]. While three of them are for the injector of a compact electron storage ring, the fourth is for various researches including LCS at JAEA. On the contrary to three injector RTMs which have a thermionic gun as the electron source, the fourth has an RF gun as the source. Therefore in principle the fourth accelerates a single bunch at a time. Higher energy RTMs over 200 MeV for NDMS has been designed on the basis of this established machine settings [3].

The configuration of the practical 150 MeV RTM [2] is shown in Fig. 1 and 2. It is shown that about the size of the main body is approximately W4m \times L1.5m \times H2m, excluding the injection line where the gun is located (not appeared in Fig. 1). It should be pointed out that one of the unique features of this type of RTM lies in the design of the main (180° bending) magnets which are the biggest components in the RTM. In contrast with its big body, they have a narrow gap, only 10 mm in height between the upper and lower poles. This method continues on the design of high energy RTMs. Assuming 220 MeV required for the new RTM [3], it would increase at about 20 ~ 30 % on its total size. The magnetic field of the main (bending) magnets has been set to around 1.2 Tesla, not so much difference between old and new designs.

Another important component is a linac placed between two main magnets, on the center portion of the first orbit

*Work supported by Strategic Funds for Promotion of Science and Technology (Grant No. 066)
[#]tosihori@iae.kvoto-u.ac.jp

(see Fig. 1). In the 150 MeV RTM, S-band linac was adopted, and this system will be kept on for the new design because of the popularity of this frequency 2856 MHz. Later shown are some exception on this design. When considering further high energy RTM, 300 MeV for instance, L-band (1300 MHz) linac is another superior candidate. First of all frequency is fixed, however, the condition of acceleration (energy gain per turn) will be remained as one of the flexible parameters. It is decided to 6 MeV/turn on the base design of 150 MeV RTM.

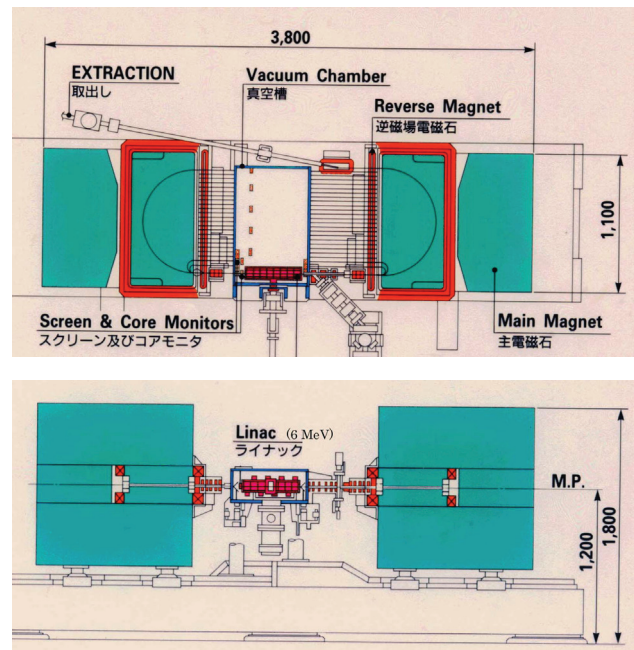


Figure 1: Cross sections of conventional 150 MeV RTM.

DESIGN CRITERIA

There are some constraints on a design of RTM [4]. The basic relationship shown below must be strictly fulfilled.

$$\Delta E(\text{MeV}) = \frac{v \cdot \lambda(\text{cm})}{2.096} B(\text{Tesla}). \quad (1)$$

Where ΔE : energy gain per turn, λ : wave length of frequency, B : magnetic field strength of the main magnets, and v (integer) is a characteristic parameter of RTM which indicates how much the circulating path elongated from the previous lap (L_n) to the next (L_{n-1}), normalized

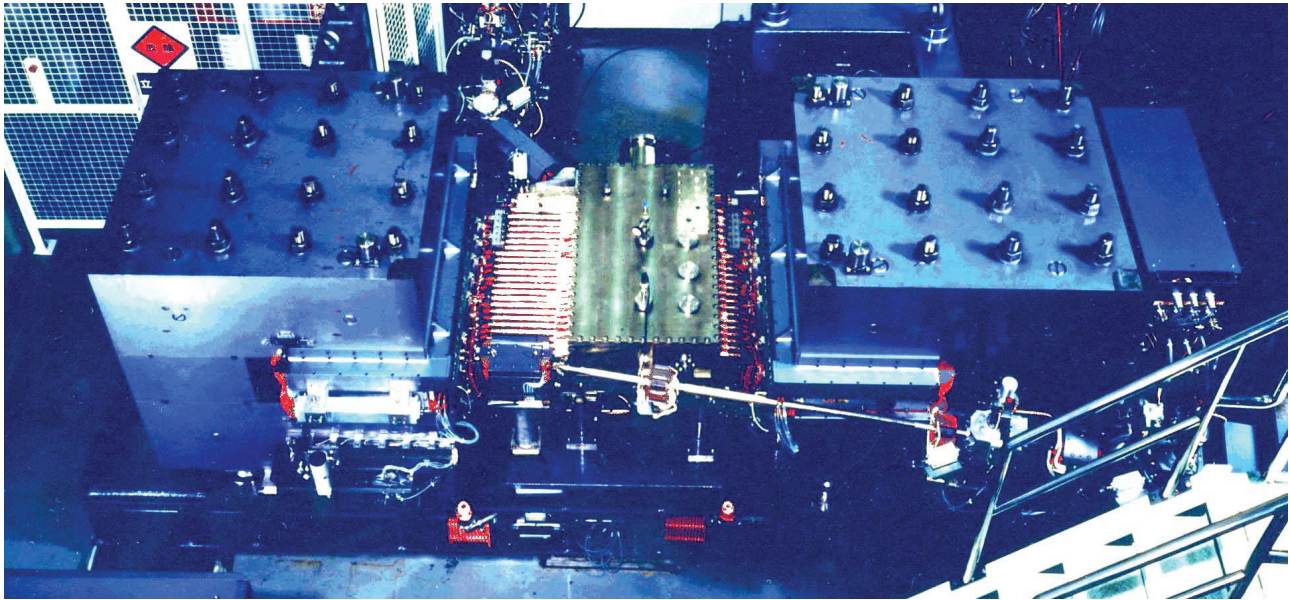


Figure 2: Whole view of the first 150 MeV RaceTrack Microtron (RTM).

Copyright © 2012 by IEEE - cc Creative Commons Attribution 3.0 (CC BY 3.0) — cc Creative Commons Attribution 3.0 (CC BY 3.0)

by λ , thus $v = (L_n - L_{n-1})/\lambda$. Violation of Eq.1 results in the lost of synchronization between accelerated electrons and accelerating RF fields in the linac. As already mentioned, typical parameters of the 150 MeV RTM are; $\Delta E = 6.0$ MeV, $B = 1.2$ Tesla, $\lambda = 10.5$ cm, and $v = 1$. Energy 150 MeV is obtained after 25 times of acceleration. The simulation and experimental results of the 150 MeV output beam qualities were already reported in detail [4]. There are two directions towards the designing of higher energy RTMs, one is to increase the energy gain per turn (ΔE), and the other to increase the number of circulation with ΔE little changed.

The v -value is normally set to the minimum digit ($v=1$), and it is rare to use $v \geq 2$ since we lose phase acceptance step by step upon the increasing of v -value. The next Eq. 2 shows the relationship between v -value and the width of the obtainable stable phase region, in other words phase acceptance.

$$0 < \tan \varphi_s < \frac{2}{\pi v} \quad (2)$$

It suggests that the widest phase stable region $0 < \varphi_s < 32^\circ$ is obtained with $v=1$, and decreasing to $0 < \varphi_s < 18^\circ$ with $v=2$. Even the widest phase acceptance at $v=1$, it is rather narrow when compared with the linac's. Fortunately this unique characteristics reflect on the good beam quality which is inevitable to LCS, and also is well matched to the RF gun which generates short bunches ≤ 10 ps. This gives us a occasion to design a high energy RTM under the condition $v=2$, as actually shown later. On the contrary the noticeable demerit is obvious, namely RTM is inadequate to produce high current beams.

ENERGY UPGRADING

Expanding the 150 MeV RTM

It is already reported that what will happen when we continue accelerating electrons over 25 turns by the existing 150 MeV RTM [4]. The result is clear in the following survival plot up to 50 turns (see Fig. 3).

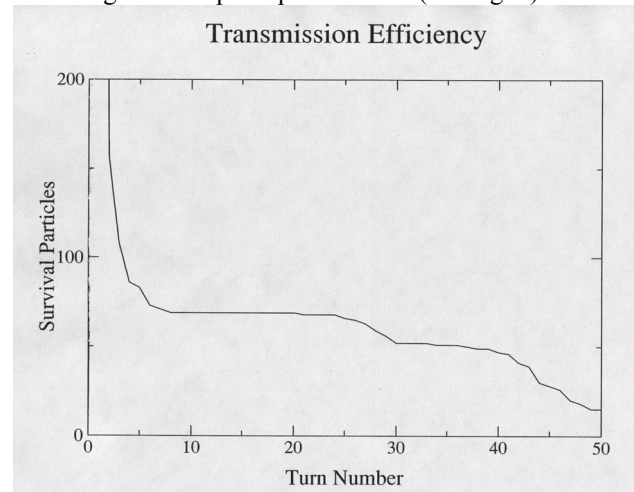


Figure 3: Transmission efficiency in the case of 300 MeV acceleration with 6 MeV/turn.

After 25 turns, a part of the beam gradually dropped out until 30 turns. However, after that the survival rate keeps in constant till ~ 40 turns. Thus three fourths of the beam get more energy than 220 MeV at 37 turns of acceleration. The reason of this 25% beam loss between 25~30 turns can explain by the phase drift of the circulating beam (see Fig. 4). The phase drift occurs continuously from the first. The simulation results of 150 MeV RTM tell us that the

initial phase stable region 32° is decreased to $\sim 20^\circ$ after 25 turns of acceleration. Suppose electrons be accelerated further, the phase stable region should be decreasing more, and some electrons would inevitably be dropping out one after another.

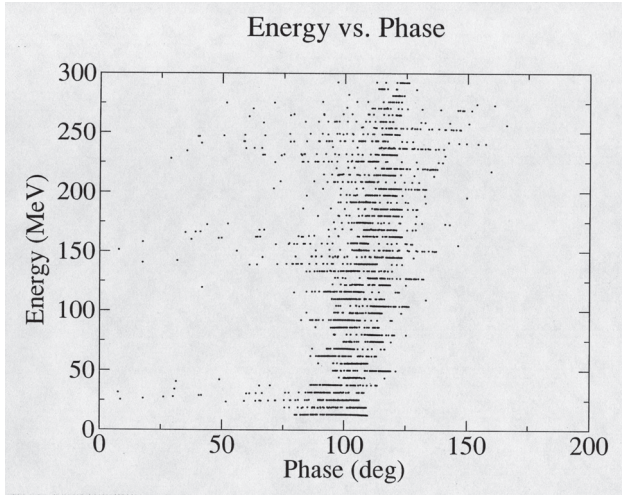


Figure 4: Phase drift of survival electrons until 50 turns (300 MeV) of acceleration with 6 MeV/turn.

It is well known that the field gradient in the bending magnets, which is necessary to produce the vertical beam focusing force, causes this phase drift. There are no QD magnets in our design, therefore one cannot remove the n -value from the main magnets. However the strength of n -value, fixed to -0.14 Tesla/m at present, might be adjustable on the new design.

High Energy Gain per Turn

Assuming that RF gun would be employed, there arises another possibility to adopt $\nu=2$ on the sacrifice of the phase acceptance becoming narrow. The stable phase region 18° of S-band is equivalent to ~ 18 ps, which seems sufficient for the acceleration of single bunch from the RG gun. One example of the design parameter is already reported [3]. The phase acceptance is checked by the simulation using a zero transverse emittance beam on the linac axis. The obtained phase stable region is $\sim 6^\circ$ after 18 turns of acceleration at 12 MeV/turn. Less than 10° of this phase stable region might be insufficient. Alternatively the combination of much more energy gain, 15 MeV/turn, with reducing turn number to 15 is another candidate. In this case 9° of phase acceptance is reserved under the assumption $B=1.5$ Tesla for the main magnets and S-band linac. The magnet gap is narrow only 10 mm, so no difficulty is expected for realizing 1.5 Tesla. Further investigations will be carried out for various cases.

Adopting L-band (1.3 GHz) Linac

There was a design report on the 300 MeV RTM, 14.3 MeV \times 21 turn, using L-band ($\lambda=23$ cm) linac [5]. The simulation results have not so much difference from the RTM's with S-band linac. Fig. 5 shows the emittances of the 300 MeV beam, where rms $(\epsilon_x, \epsilon_y) = (0.5\pi, 0.2\pi)$

mm-mrad. These are about one order larger than the case of 150 MeV beam. Main reason is derived from the large aperture of the linac bore, 10 mm/S-band vs. 22 mm/L-band. When a small emittance of RF gun is assumed, the emittance of output beam might become somewhat small. The effect of n -value is also noticeable, only 10° phase acceptance is obtained for the case $\nu=1$. These parameters are also worth to consider for NMDS.

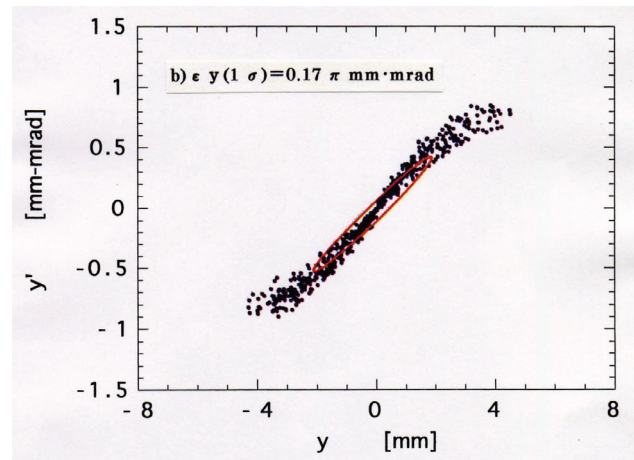
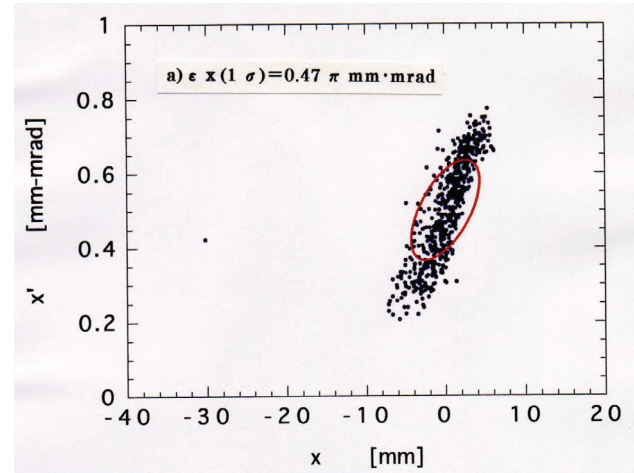


Figure 5: RMS emittances of 300 MeV beam.

REFERENCES

- [1] H. Ohgaki et al., "Conceptual Design of a NMDS Based on the Neutron/Gamma-ray Hybrid Approach", Proc. 2010 IEEE Int. Conf. on Technologies for Homeland Security, Waltham, MA, USA, Nov. 2010 p.525.
- [2] T. Hori et al., "Improvement of 150 MeV Race-track Microtron", PAC'91, San Francisco, May 1991, p.2877.
- [3] R. Hajima et al., "Compact Gamma-ray Source for Non-destructive Detection of Nuclear Material in Cargo", IPAC'11, San Sebastian, Sept. 2011, THPS098, p.3663.
- [4] T. Hori, "R&D of Injector Microtron for Compact SR Ring", SOKENDAI Doctoral Thesis (in Japanese), March, 2002.
- [5] T. Hori et al., "Report on High Energy 300 MeV Microtron as an Injector for GeV-class SR Ring", Internal Report of Sumitomo Heavy Ind., Ltd., March 1997.